


CAREFULLY FOLLOW THESE INSTRUCTIONS


# Reveal<sup>®</sup>

## SERVICE AND SELF-SERVICE DRY (AMBIENT) COUNTER INSTALLATION GUIDE


P/N 20-93325

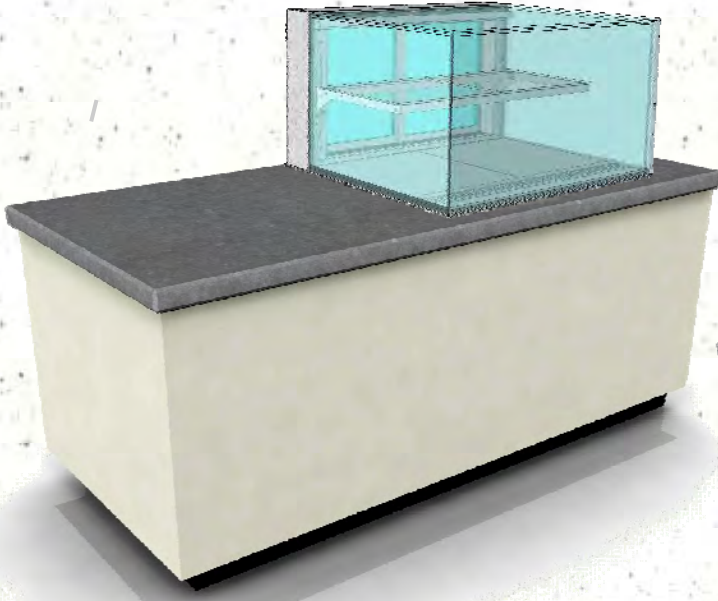


--- NE(L)(H)DSV Service Counter Front View ---

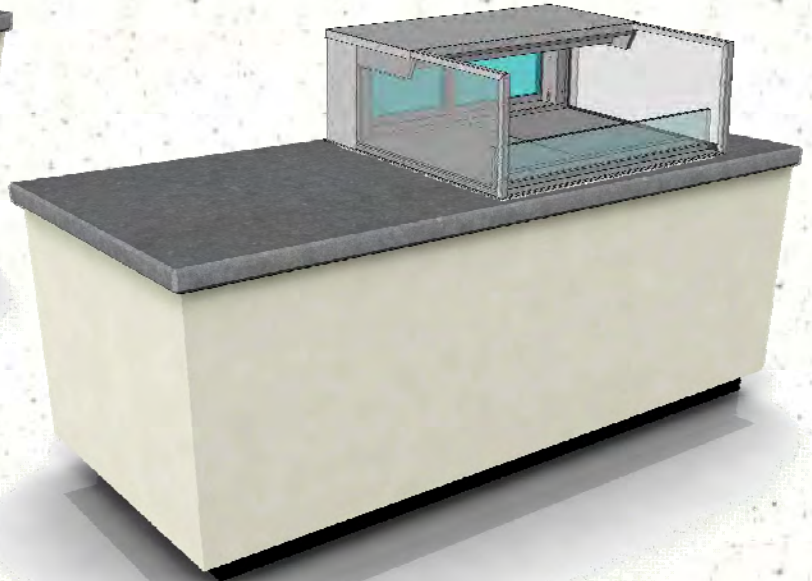

--- NE(L)(H)DSSV Service Counter Front View ---

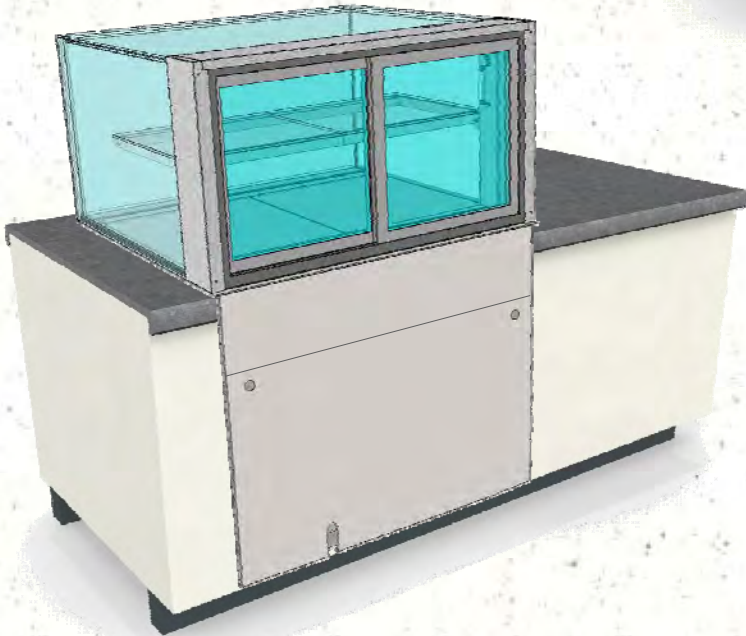


--- NE(L)(H)DSV Service Counter Rear View ---

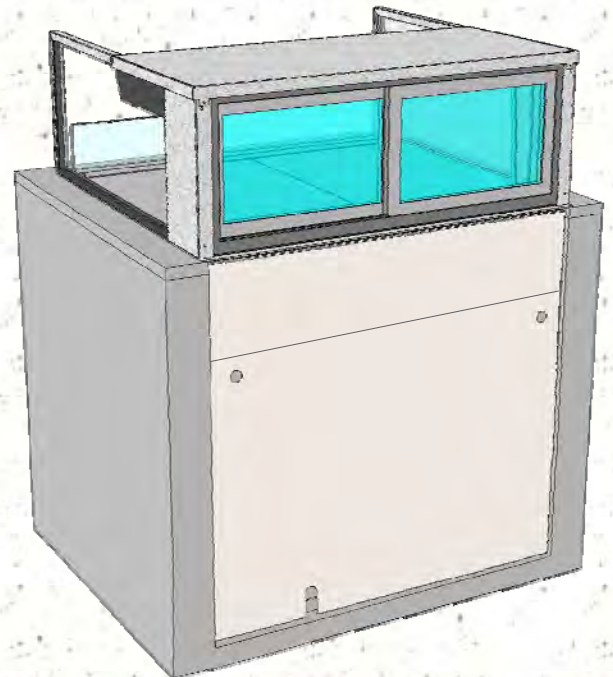

--- NE(L)(H)DSSV Self-Service Counter Rear View ---

**Note:** Rear Panels Are Customer-Provided. Rear Panel Depths Vary Depending Upon Case Depths. Models Are Shown With Random Rear Panels Depths For Illustrative Purposes Only.



Structural Concepts Corporation · 888 E. Porter Road · Muskegon, MI 49441 Phone: 231.798.8888 Fax: 231.798.4960 · [www.structuralconcepts.com](http://www.structuralconcepts.com)

**TABLE OF CONTENTS**


<b>TABLE OF CONTENTS .....</b>	<b>2</b>
<b>DRY (AMBIENT) SLIDE-IN SERVICE &amp; SELF-SERVICE UNIT COUNTER CUTOUT DIMENSIONS FRONT VIEW .....</b>	<b>3</b>
<b>DRY (AMBIENT) SLIDE-IN SERVICE &amp; SELF-SERVICE UNIT COUNTER CUTOUT DIMENSIONS REAR VIEW .....</b>	<b>4</b>

**DRY (AMBIENT) SLIDE-IN SERVICE & SELF-SERVICE UNIT COUNTER CUTOUT DIMS - FRONT VIEW**

**AMBIENT SERVICE TOP CUTOUT DIMENSIONS**

MODELS	A*	B**
NE3613DSV & NE3613DSSV	1 1/2" MINIMUM	35"
NE3620DSV & NE3620DSSV	1 1/2" MINIMUM	35"
NE3627DSV & NE3627DSSV	1 1/2" MINIMUM	35"
NE3635DSV & NE3635DSSV	1 1/2" MINIMUM	35"
NE4813DSV & NE4813DSSV	1 1/2" MINIMUM	47"
NE4820DSV & NE4820DSSV	1 1/2" MINIMUM	47"
NE4827DSV & NE4827DSSV	1 1/2" MINIMUM	47"
NE4835DSV & NE4835DSSV	1 1/2" MINIMUM	47"
NE6013DSSV	1 1/2" MINIMUM	59"
NE6020DSSV	1 1/2" MINIMUM	59"
NE6027DSSV	1 1/2" MINIMUM	59"
NE6035DSSV	1 1/2" MINIMUM	59"
NE7213DSSV	1 1/2" MINIMUM	71"
NE7220DSSV	1 1/2" MINIMUM	71"
NE7227DSSV	1 1/2" MINIMUM	71"
NE7235DSSV	1 1/2" MINIMUM	71"


\* 1 1/2" MINIMUM FROM OUTSIDE EDGE OF COUNTER SURFACE TO CUTOUT ||| \*\* COUNTER SURFACE CUTOUT WIDTH

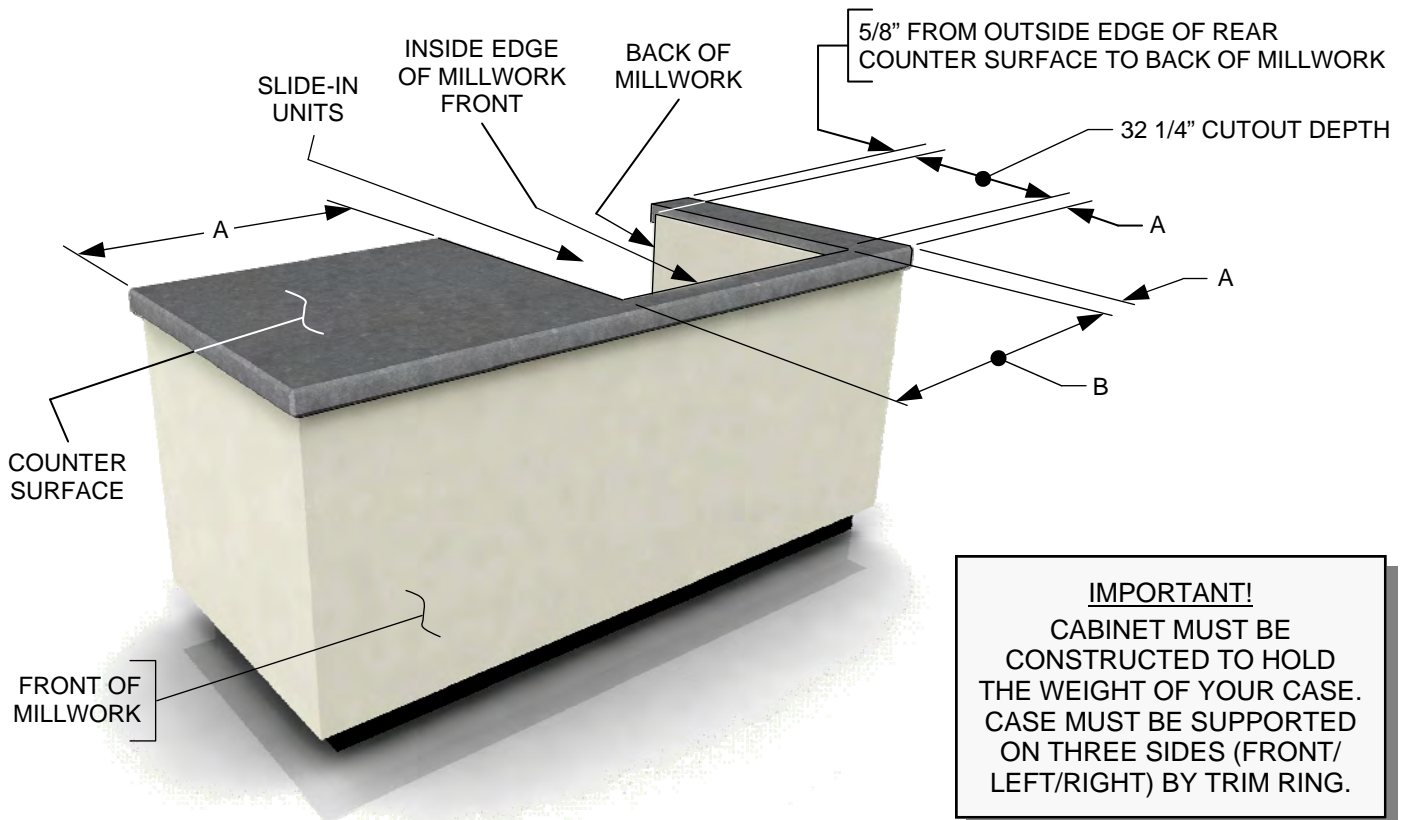

**DRY (AMBIENT) SLIDE-IN SERVICE & SELF-SERVICE UNIT COUNTER CUTOUT DIMS - REAR VIEW**

CUTOUT DIMENSIONS		
MODELS	A*	B**
NE3613DSV & NE3613DSSV	1 1/2" MINIMUM	35"
NE3620DSV & NE3620DSSV	1 1/2" MINIMUM	35"
NE3627DSV & NE3627DSSV	1 1/2" MINIMUM	35"
NE3635DSV & NE3635DSSV	1 1/2" MINIMUM	35"
NE4813DSV & NE4813DSSV	1 1/2" MINIMUM	47"
NE4820DSV & NE4820DSSV	1 1/2" MINIMUM	47"
NE4827DSV & NE4827DSSV	1 1/2" MINIMUM	47"
NE4835DSV & NE4835DSSV	1 1/2" MINIMUM	47"

\* 1 1/2" MINIMUM FROM OUTSIDE EDGE OF COUNTER SURFACE TO CUTOUT ||| \*\* COUNTER SURFACE CUTOUT WIDTH

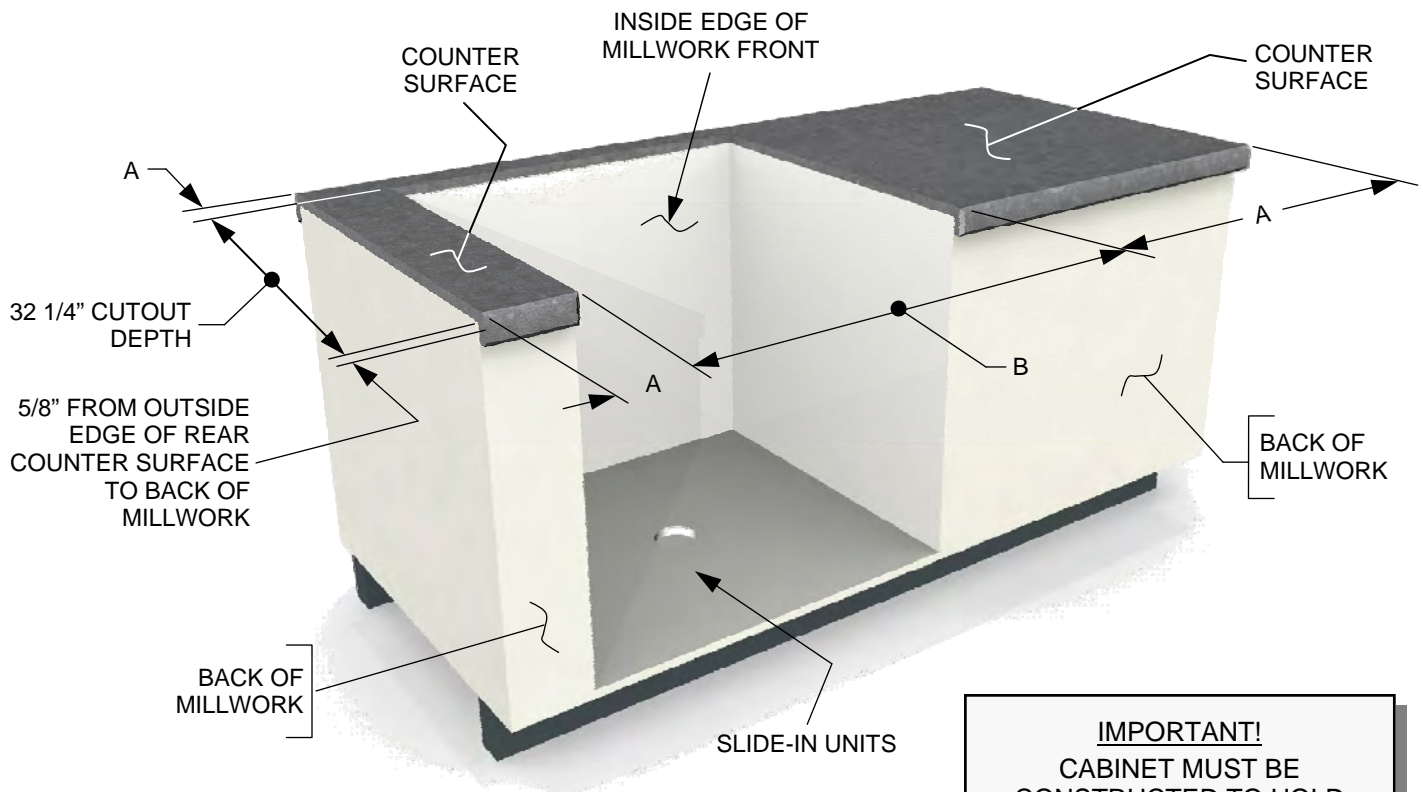

**IMPORTANT!**  
 CABINET MUST BE  
 CONSTRUCTED TO HOLD  
 THE WEIGHT OF YOUR CASE.  
 CASE MUST BE SUPPORTED  
 ON THREE SIDES (FRONT/  
 LEFT/RIGHT) BY TRIM RING.